

Energy Management System and Controlling Methods for a LDH1250HP Diesel Locomotive Based on Supercapacitors

Marius Cătălin CARP¹, Ana Maria PUȘCAȘ¹ and Paul Nicolae BORZA¹

¹ Transilvania University of Brașov, Electrical Engineering and Computer Science
29 Eroilor Street, 500036, Brașov, Romania
{ana_maria.puscas, marius.carp}@yahoo.com, paul.borza@unitbv.ro

Abstract. The present research is focused on developing solutions for increasing the lifetime of the batteries used on the diesel locomotive. In order to increase the lifetime of the batteries and to reduce the fuel consumption and the pollutants, an intelligent starting system of the diesel locomotive is proposed. The starting system is composed of supercapacitors, batteries and adequate control system used for controlling the power flow from the storage devices to the internal combustion engine in the starting process. The implementation is described, modeled and simulated and the results of the simulations are compared with the experimental ones.

Keywords: supercapacitors, embedded control, energy management, diesel locomotive, lifetime.

1 Introduction

Lately, the population became more and more dependent on transportation. Even if we speak about public transportation (buses, metros, railways) or personal vehicles, the trend of the fuel and energy consumption is alarming increasing.

Developing new solutions, technologies and methods for improving the energy efficiency represents a priority line in order to satisfy the actual energy needs.

In transportation, researches are made to improve the performances of the storage devices. The new researches from nanotechnology field allowed developing new electric storage devices with increased performances, such as supercapacitors (SSC) [1], [2], [3]. The transportation field had as target implementing different systems based on SSC that allow the displacement of the vehicles based on the self energetic resources, such as: (i) the subway from Moskow where an emergency system based on energy stored on supercapacitors and batteries allow the displacement of the metro train in emergency cases until the first station [4], (ii) the hybrid bus developed by NASA [5], (iii) the diesel locomotive developed by institutes such as ELTechnology and "Werkstoffe & Technologien, Transfer & Consulting" [6], [7]. Even if there are multiple implementations related to this topic, this field still represents a thematic of scientific interest, the focus being oriented on increasing the lifetime of the batteries

used in the starting process. Also, the research is focused on offering major improvements of the power trains of the self drives structures thus increasing their energy efficiency. At this moment the starting systems of the ICE based on the combination of batteries and supercapacitors represents a major applications class.

The aim of this research is to improve the energy efficiency, the reliability and the performances of the actual starting systems implemented on the self drive mobile structures that use internal combustion engine (ICE). The goal of the research is to modify the architecture of the starting process of a classic LDH1250HP diesel locomotive (LDH) (1250 HP) in order to increase the lifetime of the batteries, the energy efficiency and to reduce the fuel consumption and pollution. Thus, the present paper presents the design, the electric model, the prototype and the experimental results of the implemented system used for starting the LDH.

2 Contribution to Sustainability

The present research significantly improves the known ICE's starting systems based on a combination of batteries and supercapacitors. The advantages of the prototype are related to reducing the number of the accumulators thus reducing the carried weight. By using combined solutions for storage devices, the running time of the locomotive could be significantly reduced. The main benefic consequences are related to reducing the pollution and the fuel consumption. Also, by using supercapacitors - non polluting storage devices -, the number of the stops can be increased without damaging the remaining pack of batteries, thus reducing the carbon footprint. Also, by using the implemented starting system controlled by a microcontroller scheduler, the lifetime and the performances of the batteries and also the reliability of the ensemble are significantly improved. This prototype creates new opportunities in the field of power electronics used in the heavy transportation systems, increases the energy efficiency, increase the exploitation efficiency thus being in a good agreement with the principles of the sustainability.

3 Architecture of the System

In order to asses the goal of the present research, the architecture of the LDH was modified. The classic structure of the LDH is supplied from two banks of lead acid accumulators connected in parallel. One bank of accumulators consists in 8 12 V/160 Ah lead acid accumulators connected in series. In the new structure of the LDH, one of the two banks of accumulators (the second supplying branch) was replaced with three 12 F/110 V SSC connected in parallel and able to provide the equivalent power density of 218 kJ [8], [9], [10]. As consequence, the size of the replaced branch was reduced to half of its initial size and the power density was increased. Thus, the researched starting system is composed of lead acid batteries of accumulators with high energy density and SSC with high power density for providing the high peak current pulses requested in the starting process, even when

the ambient temperature is below zero centigrade thus increasing the lifetime of the battery.

4 Physical Implementation

The architecture of the prototype is illustrated in Fig. 1 and the starting system in Fig. 2.

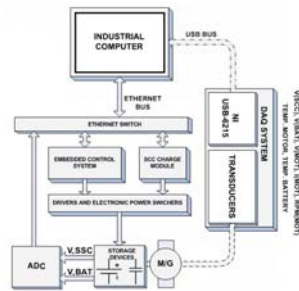


Fig. 1. General architecture of the prototype

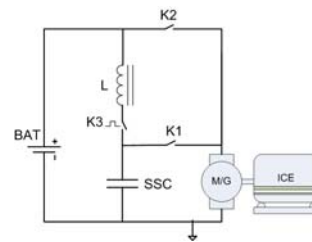


Fig. 2. Implemented starting system

The implemented and tested prototype consists in: (i) industrial computer, (ii) National Instruments data acquisition system (NI-DAQ), (iii) Ethernet network, (iv) electric high power devices (SCR) and (v) embedded control system (ECS) used for ensuring the correct power flow in the starting system.

The starting system (Fig. 2) is controlled by the algorithm implemented on the ECS and illustrated in Fig. 3.

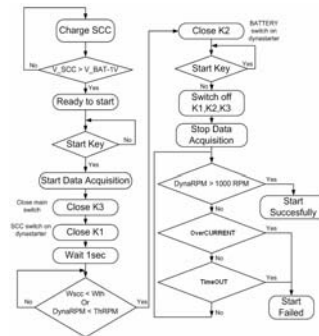


Fig. 3. Block diagram for starting the 6LDA28B ICE of the LDH1250HP locomotive

As it can be seen, the starting process begins by charging the SSC from the battery until its voltage reaches 96 V. A flag indicates the when the LDH can be started by the operator. After the starting button is pressed, the switches are firstly commuted on the SSC and after its energy is consumed, the starting process automatically commutes on the battery in order to ensure the energy for maintaining the starting process. After the ICE is running, the switches are commuted thus ensuring the charging process of the SSC from the ICE. A voltage regulator was used in order to charge and to limit the voltage on the SSC and battery pack at 110 V, thus avoiding the overcharging process which can damage the storage devices. If the velocity of the ICE does not reach its nominal value (1000 RPM) or the current absorbed from the battery is greater than a threshold current of 600 A, the fault situations can appear and an error is signalized. In the normal operation stage, the SSC play the role of a capacitive filter for smoothing the voltage on the electric circuits of the LDH. More than that, in case of switching off the locomotive, the SSC will remain charged at the maximum voltage level (around 110 V) for several hours. Thus, the voltage level on the SSC will facilitate the next starting process, the recharging of the SSC not being necessary anymore [2], [11], [12].

5 Simulations vs. Experiments and Results

Before implementing the system, to observe the behavior of the starting process of the LDH, simulations were made in PSpice tool. The model of the starting system is illustrated in Fig. 4 and the results of the simulations are illustrated in Fig. 5.




Fig. 4. Model of the starting system

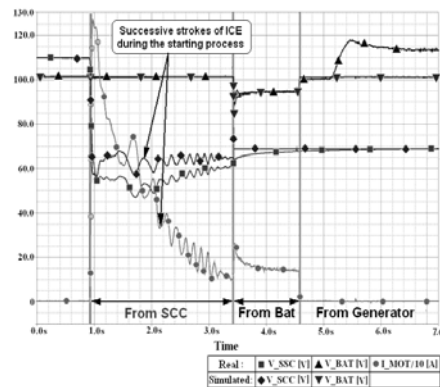


Fig. 5. Comparison between real and simulated experiments of the LDH starting system - battery and supercapacitor voltage and current

As it can be seen from Fig. 4, the model of the starting process of the LDH is composed of the 2 branches of storage devices (pack of batteries and pack of SSC)

connected to the ICE through 2 switches (K1 and K2) electronically controlled. For modeling the pack of SSC and batteries, ideal models were used. The results of the simulation are compared with the real values of the current absorbed by the ICE in the starting phase.

As it can be seen in Fig. 5, the results of the simulations follow the experimental results. The current requested by the starting process of the LDH in the first 2.5 seconds are provided by the pack of SSC. A centrifugal mechanical regulator for controlling and maintaining the revolution speed at the desired value is used by the ICE. The centrifugal mechanical regulator automatically disconnects the ICE if the revolution is not maintained at its nominal rate for about 2 seconds after the starting was made. In order to ensure these requirements, the ICE is electronically switched to be supplied from the batteries. As it can be seen from the experiments and simulations, the current provided by the battery in the starting process is about 5 times smaller than the current provided by the SSC ($I_{bat} = 16\% \cdot I_{sc}$). Thus, the implemented system is protecting the battery from the high peak current pulses, they being provided by the SSC.

The difference in the behavior of the starting process between the simulations and results is due to the ideal models from PSpice used in the simulation process. To increase the accuracy of the simulation, complex models have to be used.

In Fig. 6 the calculated power and energy flow provided from the storage devices (SSC and batteries) to the load (ICE) can be observed. These values are determined by using the raw data –voltage and current – recorded with the data acquisition system installed on the locomotive (NI-DAQ). The ability of the SSC to provide peak power relative at the batteries can be observed. As result, in Fig. 6 the slope of the energy provided by the SSC (α) is grater than the slope of the energy provided by the pack of batteries (β).

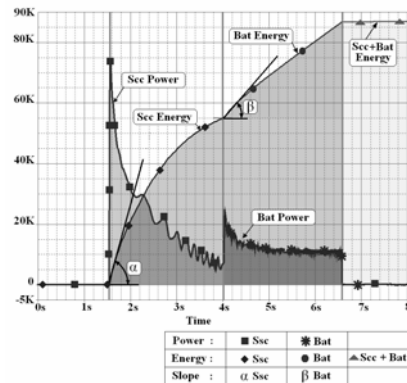


Fig. 6. Calculated power and energy corresponding to LDH starting process

In order to take the right conclusions, a data acquisition system mounted on the LDH, necessary to acquire the signals directly from the SSC, batteries and ICE was

developed. Thus, an on - line software used for data acquiring and monitoring was implemented by using Visual Studio .NET tool.

The time variation of the voltages and currents - on SSC and batteries and also the revolution speed of ICE during a real starting process is illustrated in figure Fig. 7.

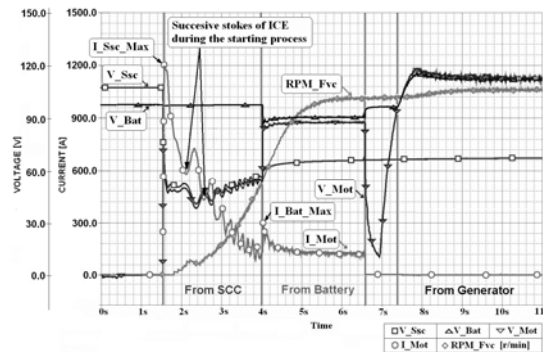


Fig. 7. Real records of the main parameters that characterize the LDH starting process

After defining several qualitative factors of the starting system, based on the acquired data a statistic was realized. The chosen factors are: (i) the rate between the maximum current provided by SSC at the starting time and the maximum current supplied by the batteries at their commutation into the DC starting motor circuit (I_{Ssc_Max}/I_{Bat_Max}), (ii) the voltage variation rate of the batteries at their commutation time on the DC starting motor, (iii) the maximum power provided by SSC and batteries during the starting process, (iv) the energy provided by the SSC and batteries during the starting process and (v) the revolution speed. All these data illustrate the quality of the starting process of the locomotive. We have also taken into account the temperature of the ICE and the ambient temperature. The real records reveal a normal variation of the above mentioned parameters. These data have been statistically analyzed and classified by labeling the starting processes as poor, good and excellent. The variation of the voltage on SSC at the initial moment was ignored because two situations were identified: (i) charging the SSC from the batteries as a result of a long resting period, (ii) charging the SSC from the generator of the LDH when the time period between the charging process of the SSC and the starting process of the LDH was short.

The statistic results are illustrated in Fig. 8, Fig. 9 and Fig. 10. From the total number of the starting process, only 1% was wrong and ignored. The successful rates of the starting process are illustrated in Fig. 8. From the total starting processes only 13 % were classified as being “poor”, and 87 % as being good or excellent. These statistic results validate our implemented and tested prototype.

The qualitative parameters mean values for the classified records are illustrated in Fig. 9 and Fig. 10. As it can be seen in Fig. 9, a good rate of the ISSC/IBAT ratio is around 500 %. Thus, because of the significant reduction of the current provided by

the batteries its reliability means a high protection of the batteries during the starting process of the LDH.




Fig. 8. Statistic of the starting processes of the LDH ICE

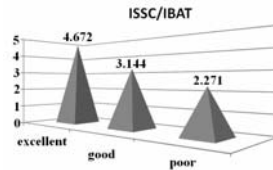


Fig. 9. ISsc/IBatt ratio




Fig. 10. PMaxSsc, WSsc, WBatt variation

In Fig. 10 are illustrated the variation of the power and energy on SSC and batteries. The first series prove the dependency of the quality of the starting process to the power level injected by SSC during the first 2.5 s. The amount of the energy transmitted to the ICE is almost the same in all cases, thus emphasizing the importance of the power time dependencies offered by our system during the starting process.

7 Conclusions and Future Work

Usually, the performances and the lifetime of the batteries are affected especially by the high peak current pulses required by the ICE in the starting process. Because our system is able to provide these peak current pulses from the SSC, the number of starts and stops of the LDH can be increased without the performances of the battery being affected. Thus, the size of the batteries was reduced to half of its initial value and the daily fuel consumption of the LDH used into the depot was reduced with around 6%. As consequence, the pollutants were also reduced.

The present paper describes the architecture of the prototype endowed with protection and self adapting features. Also, the algorithm detailed in the paper was used for controlling the correct functionality of the system and also contributed at increasing the performances of the starting system.

The paper also introduces a model of the starting process which was validated by the experimental results.

A set of criteria that reveal the “quality” of the starting process was defined and used for analyzing and classifying the experimental results. These criteria were applied for a collection of samples (492 records) from the total number of records (1300 records). The simulations and experimental results clearly demonstrate the efficiency of the implemented system in the process of increasing the lifetime of the battery.

By using the experimental data acquired in 6 months (more than 1300 records), a statistic was made, thus determining the successful rate of the starting process. The results validated the prototype.

As future work, by identifying the real parameters of the system, a software sizing tool will be conceived. This tool is necessary to minimize the size of the batteries and supercapacitors by correlated these with the characteristics of the ICE.

Acknowledgment: The present paper is a part of the national “TRANS-SUPERCAP” D21018/2007 project, currently under development at Transilvania University of Brasov.

References

1. Conway, B.E.: Electrochemical supercapacitors – scientific fundamentals and technological applications. New York, Kluwer Academic/Plenum Publishers (1999)
2. Chesa, A.: Locomotiva diesel hidraulica de 1250CP, ASAB Publisher, pp. 382-390 (2001)
3. Sojref, D., Kuehne, R.: Supercapacitors – the European Experience in Transit Applications. In: Advanced Capacitor World Summit 2008, San Diego, CA, July (2008)
4. Sukhorukov, A. I.: Movement of metro train by supercapacitor - Electric train repair plant of Moscow metro. COST Action 542, Presentation.
5. *** http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19980013899_1998058116.pdf
6. *** <http://www.cantecsystems.com/ccrdocs/ELIT-Technology-Overview.pdf>
7. *** http://www.trecstep.com/German_Startup_Diesel_Start_engl.pdf
8. Petreus, D. et al: Modeling and Sizing of Supercapacitors. In: Advances in Electrical and Computer Engineering Volume 8, Number 2, pp. 15 – 22 (2008)
9. Diab, Y. et al: Self Discharge Characterization and Modeling of Electrochemical Capacitor Used for Power Electronics applications. In: IEEE Transactions on Power Electronics, vol. 24, no.2, pp. 510—517 (2009)
10. Bohlen, O. et al: Ageing behaviour of electrochemical double layer capacitors Part I. Experimental study and ageing model. In: Journal of Power Sources, vol. 172, pp. 468—475 (2007)
11. Carp, M.C. et al.: Monitoring system and intelligent control system used in the starting process of a LDH1250HP. In OPTIM 2010 12th, pp. 551--556 (2010)
12. Sojref, D., Borza, P.: Comparison of High-Voltage Supercapacitor Approaches and Case Study in Diesel Locomotive Starting System. In: 3rd European Symposium on Supercapacitors and Applications: ESSCAP2008, (2008)